

21500-17

Roof Drain


Large Sump

Specification

Josam 21500-17 series coated cast iron drain, large polypropylene locking dome, 2" high solid Wejloc® nonpuncturing clamp ring, large sump with wide roof flange and bottom outlet.

- THIS DIMENSION IS 5-3/4 FOR 21508-T
- GASKET ON -Y CONNECTION CONFORMS WITH ASTM - C564

- -X = 5-3/8
- -Y = 4-7/8
- -Z = 5-1/8
- -T = 3-3/4

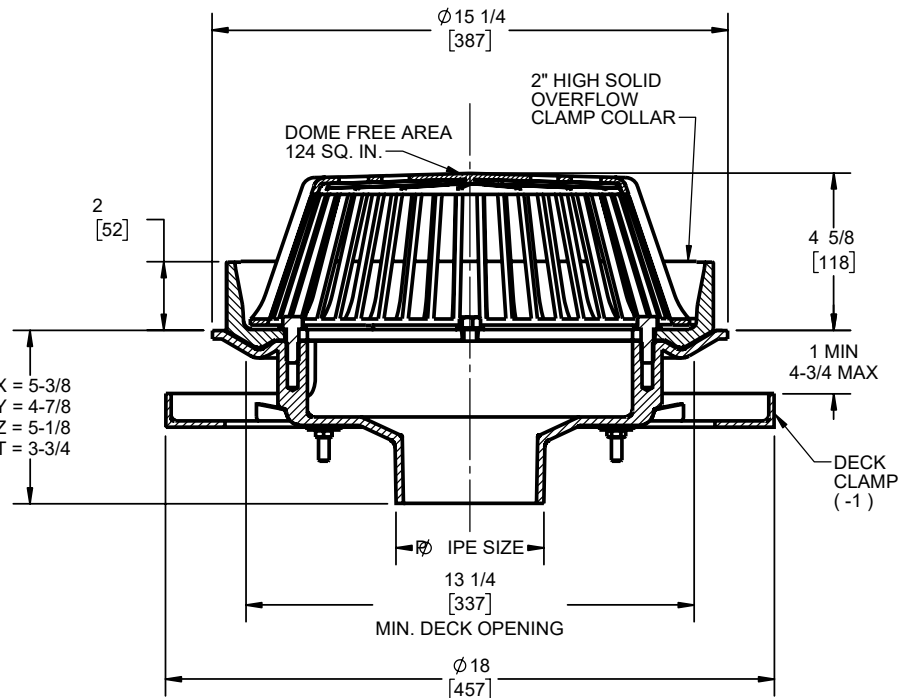

** -10 Extension 4" standard

2"	Pipe Size
3"	Pipe Size
4"	Pipe Size
5"	Pipe Size
6"	Pipe Size
8"	Pipe Size
10"	Pipe Size (No-Hub Only)
-X	Inside Caulk Outlet
-Y	Hub Outlet W/Gasket (2", 3" & 4" Sizes Only)
-Z	No-Hub Spigot Outlet
-T	Threaded Outlet
-AE	Threaded Levelze® Adj. Ext.
-AER	Adj. Ext. Using Threaded Rods
-IRMA	Perforated Stainless Steel Ext.
-CR	Clamping Drain Receiver (Min. Deck Opening Ø 16")
-VP	Secured Dome
-1	Deck Clamp Assy
-1C	Drain Receiver Clips (Min. Deck Opening Ø 16")

-2	Drain Receiver
-3	Deck Clamp Assy. & Drain Receiver
-3C	Drain Receiver & Drain Receiver Clips
-4	Secondary Flashing Clamp (-AE Only)
-6	Extra Wide Flange Drain Body
-10	Fixed Ext. Collar (Specify Ht.**)
-10-20	Fixed Ext. Collar, Galv. (Specify Ht. **)
X -17	2" High Solid Clamping Collar
-19	Clamp Collar W/Perforated Stainless Steel Gravel Guard
-20	Galv. Cast Iron Parts
-22	Cast Iron Dome
-22-21	Cast Iron Dome Only
-23	Rough Bronze Dome
-26	Aluminum Dome
-33	Stainless Steel Mesh-Covered Dome
-66	No-Hub Side Outlet (2" Thru 6" Outlets Only)
-FG	Flat Grate

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

