


21500-18

Roof Drain DEEP SUMP

Specification

Josam series 21500-18 coated cast iron roof drain, large polypropylene locking dome, Wejloc® non-puncturing clamp ring with integral gravel stop, deep sump with wide roof flange and bottom outlet.

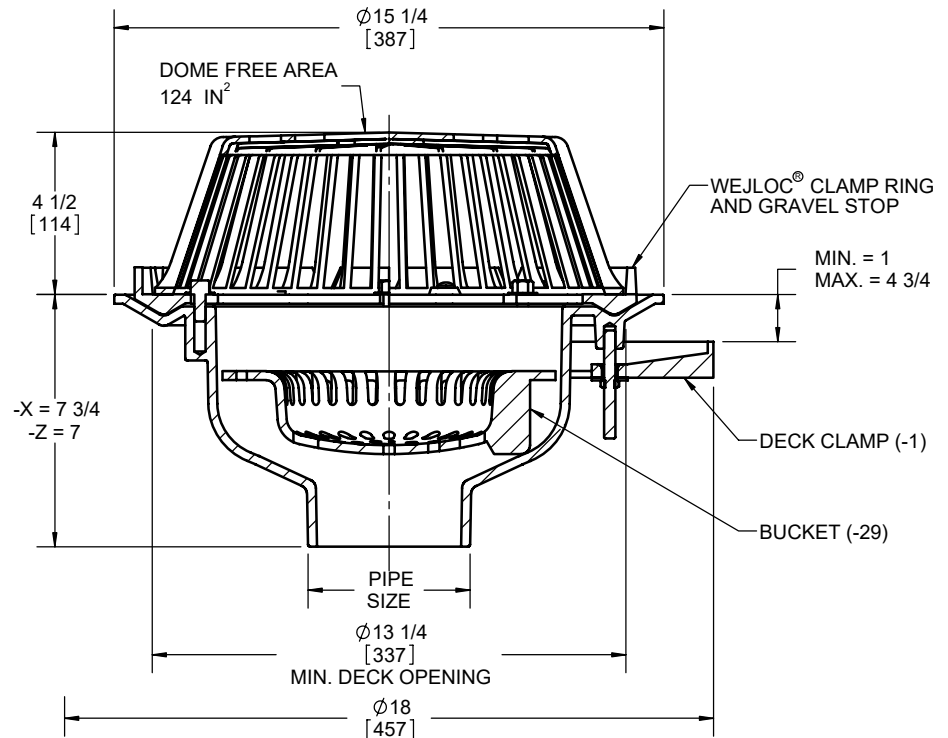

	2"	Pipe Size
	3"	Pipe Size
	4"	Pipe Size
	5"	Pipe Size
	6"	Pipe Size
	-X	Inside Caulk Outlet
	-Z	No-Hub Spigot Outlet
	-AE	Threaded Levelze Adj. Ext.
	-AER	Adj. Ext. Using Threaded Rods
	-IRMA	Perforated Stainless Steel Ext.
	-CR	Clamping Drain Receiver (Min. Deck Opening $\varnothing 16"$)
	-1	Deck Clamp Asy.
	-1C	Drain Receiver Clips (Min. Deck Opening $\varnothing 16"$)
	-2	Drain Receiver
	-29	Bucket
	-3	Deck Clamp Asy. And Drain Receiver

	-3C	Drain Receiver And Drain Receiver Clips
	-4	Secondary Flashing Clamp (-AE Only)
	-6	Extra Wide Flange Drain Body (-X Outlet Only)
	-10	Fixed Ext. Collar, Cast Iron (Specify Ht.**)
	-10-20	Fixed Ext. Collar, Galv. (Specify Ht.**)
	-16*	Internal Watertight (2" Thru 6" Outlets Only)
	-17*	2" High Solid Clamping Collar
	-19	Clamp Collar W/Perforated Stainless Gravel Guard
	-20	Galv. Cast Iron Parts
	-22	Cast Iron Dome
	-22 21	Galv. Cast Iron Dome Only
	-23	Rough Bronze Dome
	-26	Aluminum Dome
	-33	Stainless Steel Mesh-Covered Dome
	-66	No-Hub Side Outlet (2" Thru 6" Outlets Only)
	-VP	Secured Dome

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

