


# 21500-3

## Roof Drain Large Sump Specification

Josam 21500-3 series coated cast iron roof drain, large polypropylene locking dome, Wejloc® non-puncturing clamp ring with integral gravel stop, large sump with wide roof flange, bottom outlet, deck clamp assembly and drain receiver.

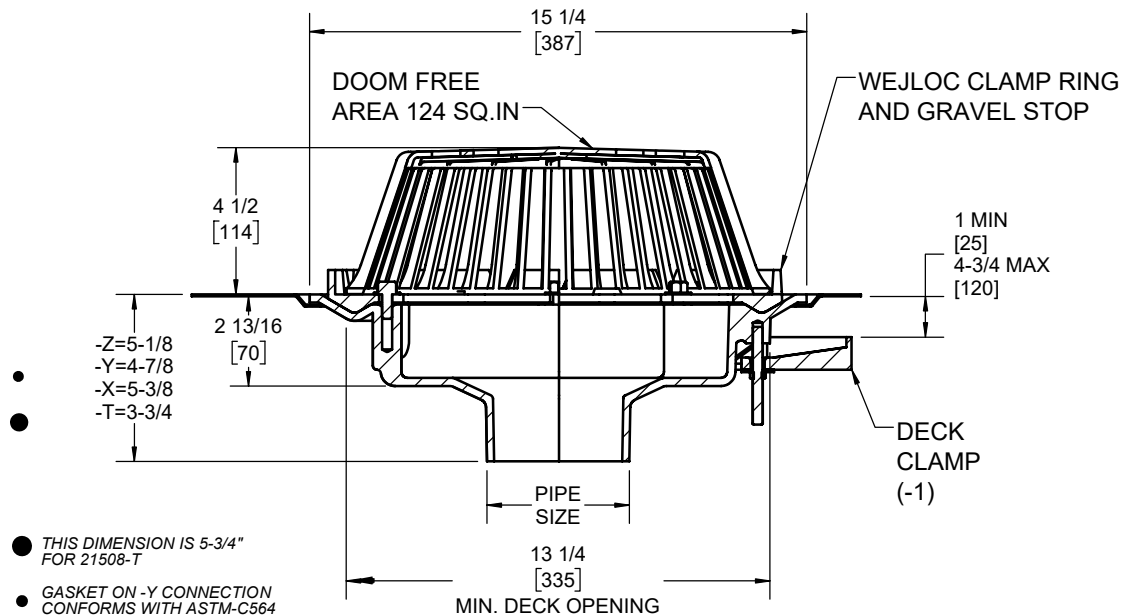

▼ Separate submittal for this option available

|  |   |       |                                                   |
|--|---|-------|---------------------------------------------------|
|  |   | 2"    | Pipe Size                                         |
|  |   | 3"    | Pipe Size                                         |
|  |   | 4"    | Pipe Size                                         |
|  |   | 5"    | Pipe Size                                         |
|  |   | 6"    | Pipe Size                                         |
|  |   | 8"    | Pipe Size                                         |
|  |   | 10"   | Pipe Size (No-Hub Only)                           |
|  |   | -X    | Inside Caulk Outlet                               |
|  |   | -Y    | Hub Outlet W/Gasket (2", 3" & 4" Sizes Only)      |
|  |   | -Z    | No-Hub Spigot Outlet                              |
|  |   | -T    | Threaded Outlet                                   |
|  | ▼ | -AE   | Threaded Leveze® Adj. Ext.                        |
|  | ▼ | -AER  | Adj. Ext. Using Threaded Rods                     |
|  | ▼ | -IRMA | Perforated Stainless Steel Ext.                   |
|  |   | -CR   | Clamping Drain Receiver (Min. Deck Opening Ø 16") |
|  |   | -1    | Deck Clamp Asy.                                   |
|  |   | -1C   | Drain Receiver Clips (Min. Deck Opening Ø 16")    |
|  |   | -2    | Drain Receiver                                    |

\* -16 & -17 Cannot be furnished together

\*\* -10 Ext. 4" Standard

|   |   |         |                                                           |
|---|---|---------|-----------------------------------------------------------|
| X |   | -3      | Deck Clamp Asy. And Drain Receiver                        |
|   |   | -3C     | Drain Receiver And Drain Receiver Clips                   |
|   |   | -4      | Secondary Flashing Clamp (-AE Only)                       |
|   | ▼ | -6      | Extra Wide Flange Drain Body (-X Outlet Only)             |
|   |   | -10     | Fixed Ext. Collar, Cast Iron (Specify Ht.**)              |
|   |   | -10-20  | Fixed Ext. Collar, Galv. (Specify Ht.**)                  |
|   | ▼ | -16*    | Internal Waterguard (2" Thru 6" Outlets Only)             |
|   |   | -16GLV* | Internal Waterguard Galvanized Steel (2"-6" Outlets Only) |
|   | ▼ | -17*    | 2" High Solid Clamping Collar                             |
|   |   | -19     | Clamp Collar W/Perforated Stainless Gravel Guard          |
|   |   | -20     | Galv. Cast Iron Parts                                     |
|   |   | -22     | Cast Iron Dome                                            |
|   |   | -22-21  | Galv. Cast Iron Dome Only                                 |
|   |   | -23     | Rough Bronze Dome                                         |
|   |   | -26     | Aluminum Dome                                             |
|   |   | -33     | Stainless Steel Mesh-Covered Dome                         |
|   |   | -66     | No-Hub Side Outlet ( 2" Thru 6" Outlets Only )            |
|   |   | -VP     | Vandal-Proof Dome                                         |

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



**A WATTS Brand**