
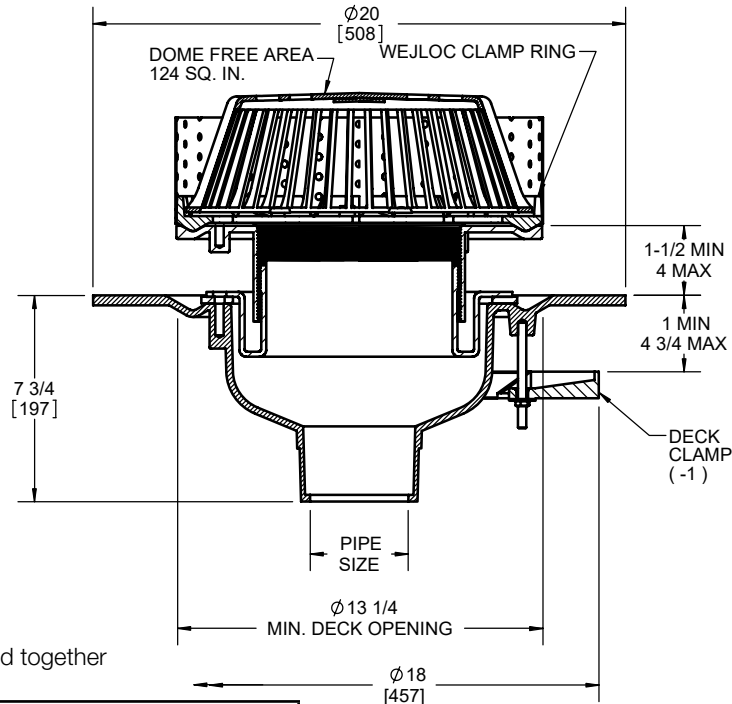


21500-6-AE-19

Roof Drain

Large Sump, Wide Flange, Adj. Ext., Perf Grav Grd Specification

Josam 21500-6-AE-19 series coated cast iron drain, large polypropylene locking dome, Wejloc® non-puncturing clamp ring with integral gravel stop, large sump with extra-wide roof flange and bottom outlet inside caulk connection, adjustable extension and perforated stainless steel gravel guard.

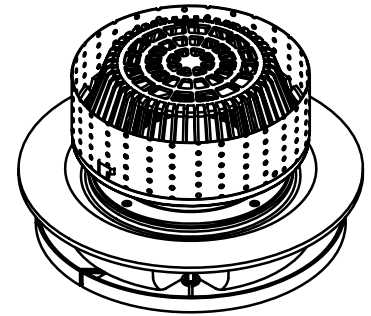

* -16 & -17 Cannot be furnished together

** -10 Ext. 4" Standard

	2"	Pipe Size
	3"	Pipe Size
	4"	Pipe Size
	5"	Pipe Size
	6"	Pipe Size
X	-X	Inside Caulk Outlet
X	-6	Extra Wide Flange Drain Body
X	-AE	Threaded Levelze® Adj. Ext.
	-IRMA	Perforated Stainless Steel Ext.
	-1	Deck Clamp Asy.
	-10	Fixed Ext. Collar, Cast Iron (Specify Ht.**)
	-10-20	Fixed Ext. Collar, Galv. (Specify Ht.**)

	-16*	Internal Waterguard
	-17*	2" High Solid Clamping Collar
X	-19	Clamp Collar W/Perforated Stainless Gravel Guard
	-20	Galv. Cast Iron Parts
	-22	Cast Iron Dome
	-22-21	Galv. Cast Iron Dome Only
	-23	Rough Bronze Dome
	-26	Aluminum Dome
	-33	Stainless Steel Mesh-Covered Dome
	-66	No-Hub Side Outlet
	-VP	Vandal-Proof Dome

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

