


21500-IRMA-6

Roof Drain

With Perf. Stainless Extension

Specification

Josam 21500-IRMA-6 series coated cast iron roof drain, large polypropylene locking dome, dome supporting ring, perforated stainless steel extension filter, Weijloc® non-puncturing clamp ring with integral gravel stop, large sump with extra-wide roof flange and bottom outlet inside caulk connection.

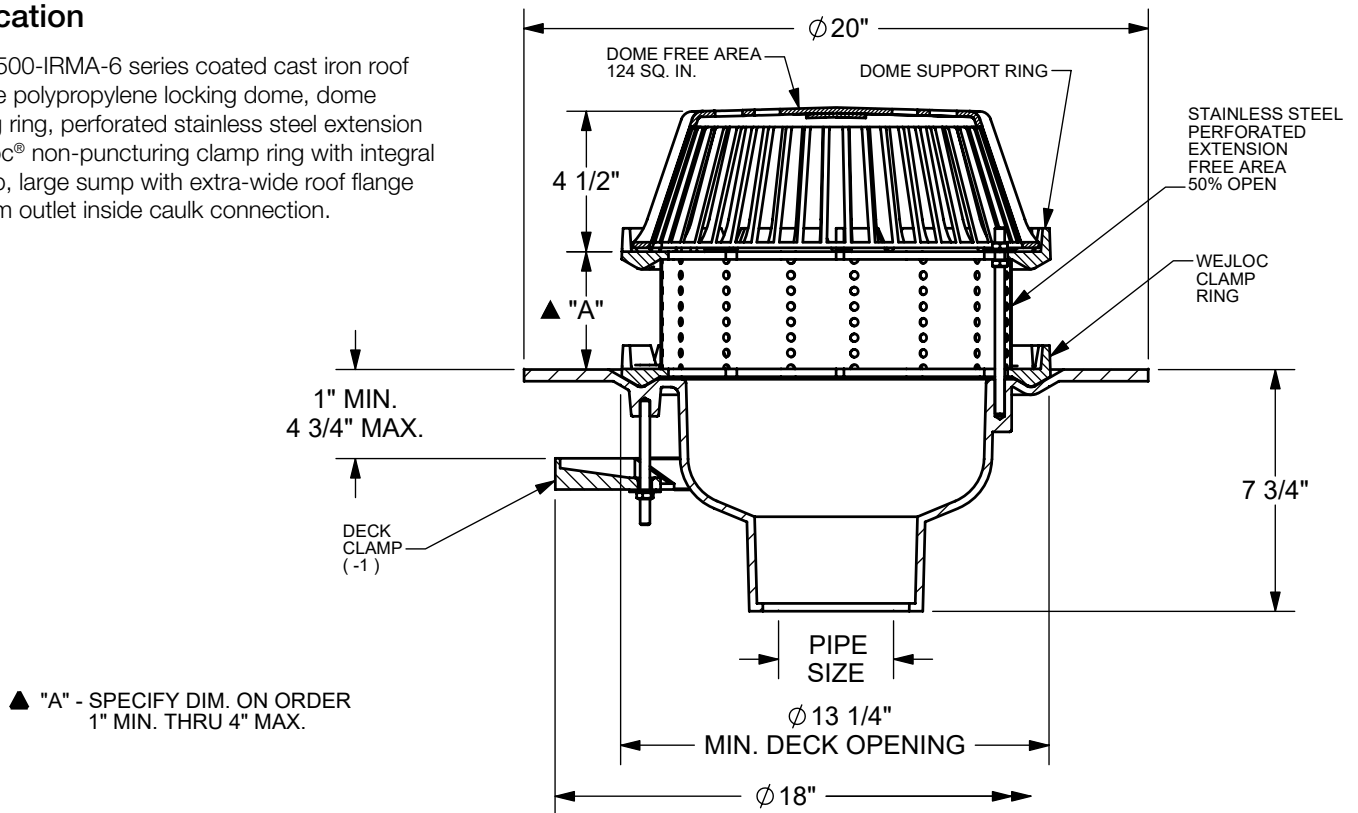

*-16 & -17 Cannot be furnished together

	2"	Pipe Size
	3"	Pipe Size
	4"	Pipe Size
	5"	Pipe Size
	6"	Pipe Size
X	-X	Inside Caulk Outlet
X	-IRMA	Perforated Stainless Steel Extension
	-1	Deck Clamp Assembly
X	-6	Extra Wide Flange Drain Body
	-10	Fixed Ext. Collar, Cast Iron (Specify Height **)
	-10-20	Fixed Ext. Collar, Galvanized (Specify Height **)

** -10 Extension 4" standard

-16*	Internal Waterguard
-17*	2" High Solid Clamping Collar
-19	Clamp Collar W/Perf. Stainless Gravel Guard
-20	Galvanized Cast Iron Parts
-22	Cast Iron Dome Only
-22-21	Galvanized Cast Iron Dome Only
-23	Rough Bronze Dome
-26	Aluminum Dome
-33	Stainless Steel Mesh-Covered Dome
-66	No-Hub Side Outlet
-VP	Vandal-Proof Dome

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

