
DOME:

21500-SS-16

Roof Drain Stainless Steel, Overflow Specification


Josam series 21500-SS-16 stainless steel (type 304) overflow roof drain with no-hub bottom outlet.

□ Ø 19 1/4" for -6 option

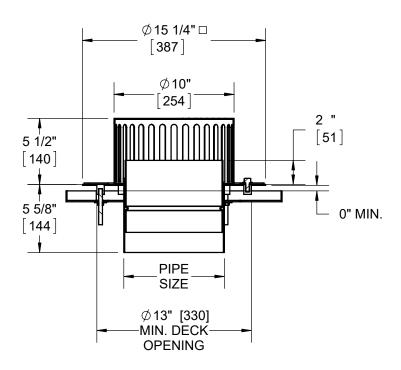

TOP CLAMP	
BOLTS	•
TOP CLAMP	
OVERFLOWBODY	
UNDERDECK CLAMP AND HARDWARE – (-1 OPTION)	
	+
	# #

DOME FREE AREA: 103 SQ. IN. DOME SLOT WIDTH: 1/2"



Pipe Size
2"
3"
4"
6"
8"

Options		
	-1	Underdeck Clamp
	-2	Drain Receiver
	-6	Wide Flange
	-VP	Secured Dome
	-BW	Butt-Weld Outlet (Spec. 5s, 10s, 40s)
	-PF	Outlet For Josam Push-Fit System
	-316	Type 316L Material

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



T: (800) 365-6726 • Josam.com

A WATTS Brand

ES-J-21500-SS-16 2412 © 2024 Josam