

12694-32

Closet Carrier Back-To-Back Specification

Josam 12694-32 series coated cast iron single horizontal 4" no-hub back-to-back fitting with 2" no-hub vent and adjustable carrier body, invertible for siphon jet or blowout closets, with ABS extensions with integral test caps, pylon feet, plated hardware and neoprene fixture gaskets. 500 LB capacity.




- * Recommend feet be secured to floor with 1/2 fasteners and anchors (by others).

⊗ For dimensions shorter than 5-1/2" (1" min.) cut extension.
For longer extension length (10-1/2" max.) specify (-10).

Siphon jet dimensions shown.
For blowout dimensions use:

- Min. 2" and max. 4"
- Min. 11" and max. 16-1/2"
- For siphon jet roughing over 6" or blowout roughing over 12-1/2" specify on order.

⊙ Auxiliary inlet is 6" offset from vent.

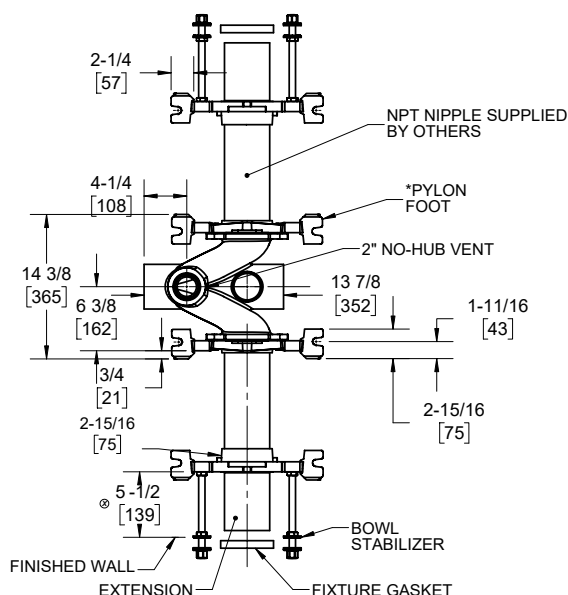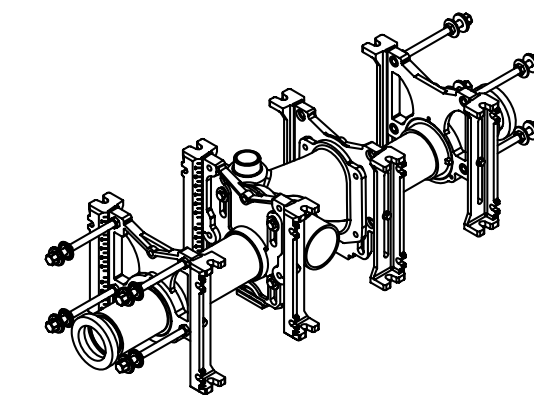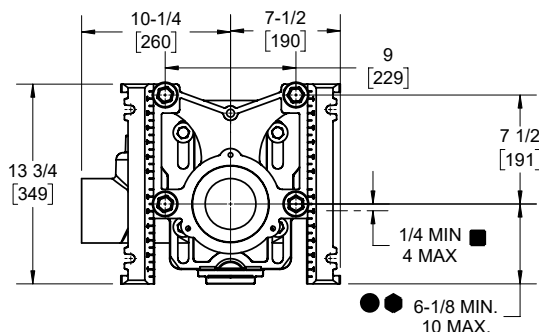

X	-PF	Pylon foot (standard)
	-AUX	⊙ Auxiliary inlet (2" no-hub)
	-HUB AUX	⊙ Auxiliary inlet (2" hub)
	-VP	Secured trim
	-1	Positioning frame
	-58	Horizontal no-hub cast long barrel
	-XSD	Extra special-duty 1,000 LBS carrier

	-6	Supply pipe support (specify type of pipe)
	-10	ABS extension through 10-1/2" wall
	-24	Floor mounted back outlet china bowl
	-30	Cast iron adj. ext. with connector
	-30-2	Cast iron adj. ext. with connector and test cap
X	-32	Carrier for wide chase installations
	-35	Carrier for wheel chair high rough

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

