

47300-LB

SS Mini Channel




3" Wide - Less Outlet Box (XY)

Specification

Josam series 47300-LB fabricated stainless steel (type 304, 1.5 mm), 3" wide, V-shaped bottom, available with or without slope (1% STD.), with anchor tabs and leveling feet, with 2" bottom connection and perforated grate. Run lengths longer than 13' provided with flanges, gaskets, and hardware.

STD. grate: slot width = .3 [8] heel-resistant.

Free area = 7.8 IN² / FT.

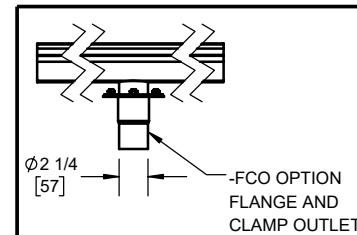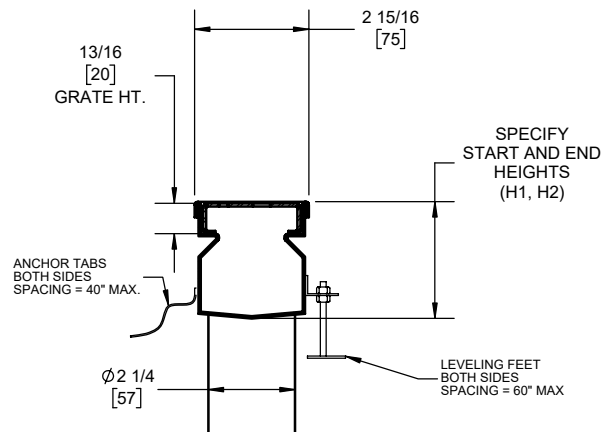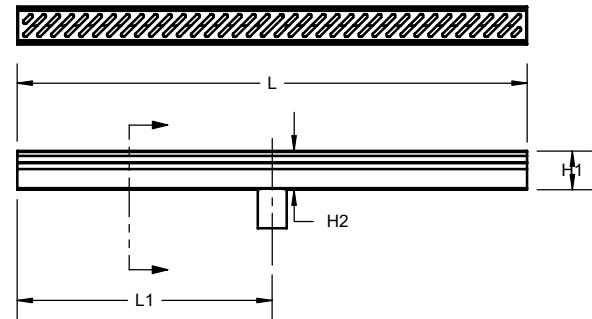

Specifications:

☐ Linear run

Total run length (L) = _____

Start height (H1) (min 3" [75]) = _____

☐ Height at outlet box (H2) = _____

☐ Or STD 1% slope

☐ Outlet at end of run

☐ Outlet mid-run (Spec. length L1) = _____

☐ Non-linear run

Provide sketch with critical length and height dimensions and outlet location(s).

Authorized project signature and date:

Name: _____

Title: _____

Signature: _____

Date: _____

Note: All SS mini channels are custom fabricated.
Orders are non-cancellable and non-returnable

X = Grate type

☐	0	No grate
☐	1	Perforated sheet grate
☐	2	Anti-slip mesh grate
☐	3	Perimeter slot grate
☐	4	Ladder grate

Y= Outlet size

☒	2"
-------------------------------------	----

OPTIONS:

☐	-FB	Flat strainer
☐	-VP	Secured grate
☐	-316	Type 316L material
☐	-BW	Butt-weld outlet (spec. 10, 40, 80)
☐	-FCO	Flange and clamp outlet

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

