

55000-SS-SD




Cleanout

Round Stainless Laminate Top

Specification

Josam 55000-SS-SD series coated cast iron Kleenatron® II Leveleze® floor cleanout, internal ABS cleanout plug, adjustable cast iron housing with special-duty smooth secured round laminated stainless steel cover.

Flange standard on 4" -X and 6" sizes.

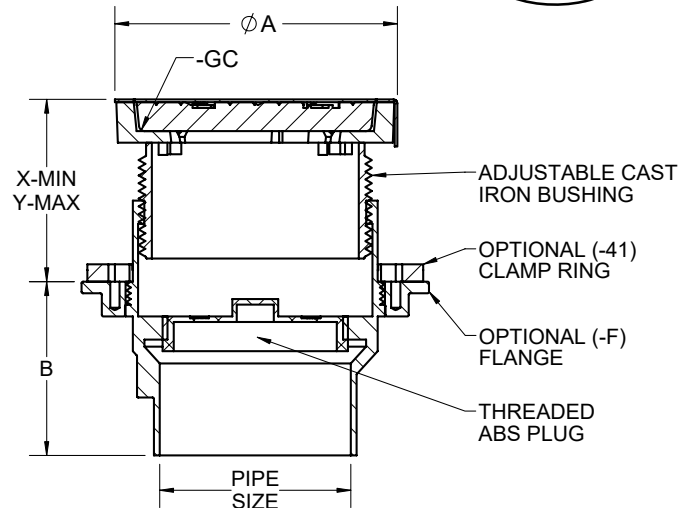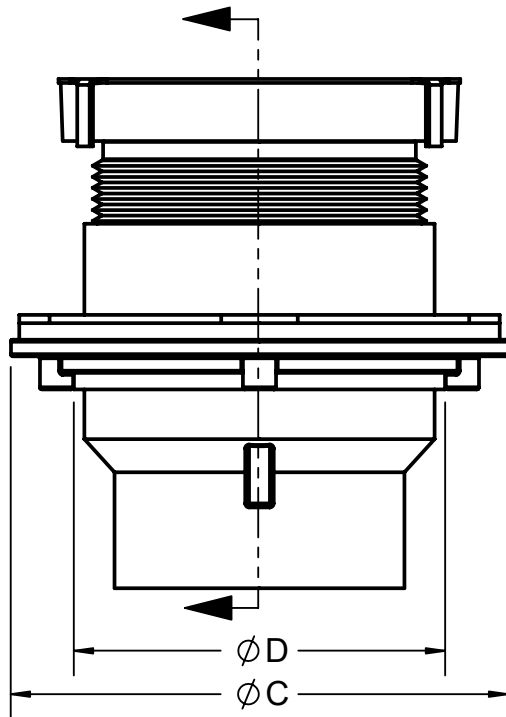

	Pipe size	A	B	C	D	X	Y
	2"	6 1/8	3 3/4	7 1/2	5 9/16	2 7/8	4 5/8
	3"	6 1/8	3 3/4	7 1/2	5 9/16	2 7/8	4 5/8
	4"	6 1/8	3 3/4	7 1/2	5 9/16	2 7/8	4 5/8
	4" -X	7 3/4	4 1/4	9 3/16	7	2 3/4	4 11/16
	5" -Z	6 1/8	3 3/4	7 1/2	5 9/16	2 7/8	4 5/8
	6" -Z	7 3/4	4 1/4	9 3/16	7	2 3/4	4 11/16

OPTIONS:

X	-SS-SD	Special-duty satin finish stainless top
	-14	Carpet cleanout marker
	-VP	Secured cover, vandal-proof screws
	-22	Taper thread bronze plug
	-31	Galvanized cast iron parts
	-41	Clamp ring and flange
	-GC	Gasketed cover

	-F	Flange only
	-WF	Wide flange
	-CFC	Carpet cleanout flange cover
	-DBC	Debris cover
	-X	Inside caulk outlet
	-Y	Hub outlet w/gasket (2", 3", & 4" sizes only)
	-Z	No-hub outlet

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand