

60500B-EXT




Oil Separator

Draw-Off, Gravity Type

Specification

Josam 60500B-EXT series epoxy coated fabricated steel oil separator, threaded connections, deep roughing, internal extension, internal trap, sediment bucket, two-vent connections on each side, gasketed non-skid cover and flow-control fitting.

Formerly 60520A series.

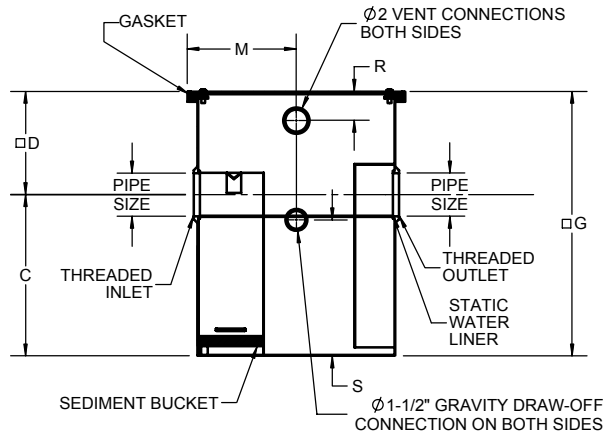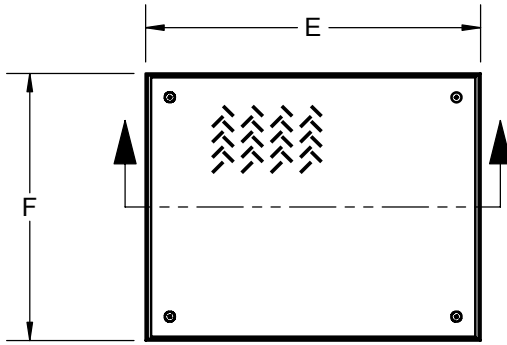

Product is non-cancellable
and non-returnable

Name: _____ Signature: _____ Date: _____

OPTIONS:

X	-EXT	Extension, 6" standard (specify ext. height)
	-EST	Extra storage tank
	-60	Anchor flange (5" down from top)
	-61	Flange and clamp device (5" down from top)
	-HD	Heavy-duty cover (must specify with separator order)

For custom extension height:

Specify "D" dimension= _____ in.

New "G" dimension= _____ in.
("C" + "D")

	Type	Flow rate (GPM)	Pipe size	C	□D	E	F	□G	M	R	S
	60503B	10	2"	10 1/2"	10 1/8"	15 1/2"	12 3/8"	20 5/8"	7 3/4"	2 3/4"	6 3/4"
	60504B	15	2"	12 3/4"	9 3/8"	18 1/4"	14 1/2"	22 1/8"	9 1/8"	2 3/4"	9"
	60505B	20	* 3"	14 5/8"	10 3/8"	20"	16 3/8"	25"	10"	2 3/4"	10 1/4"
	60506B	25	* 3"	16"	10"	21 3/4"	17 1/2"	26"	10 7/8"	2 3/4"	11 3/4"
	60507B	35	* 3"	16 3/4"	10 7/8"	25 1/4"	19 1/4"	27 5/8"	12 5/8"	2 3/4"	12 1/2"
	60508B	50	* 3"	18 1/2"	12 1/4"	28 3/4"	21 1/2"	30 3/4"	14 3/8"	2 3/4"	14 1/4"

□ Dimensions based on standard 6" extension.

* 3" sizes normally furnished with 4" x 3" reducing bushings.

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

