



61100-EXT

Sand Interceptor


Specification

Josam series 61100-EXT series sand interceptor, white epoxy coated, top access slotted grate, outlet trap seal and threaded connections.


Formerly 61044-Q14-EXT.

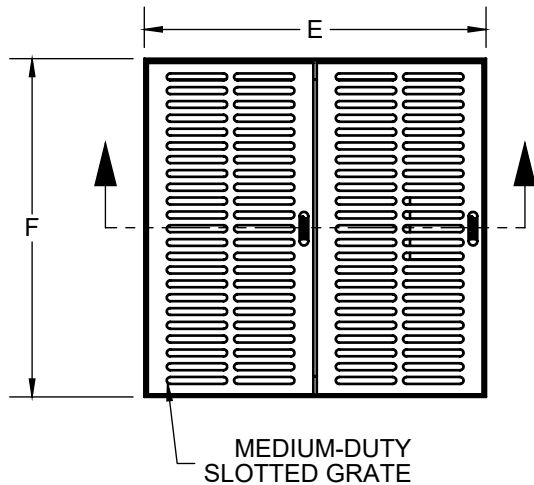

61103-EXT

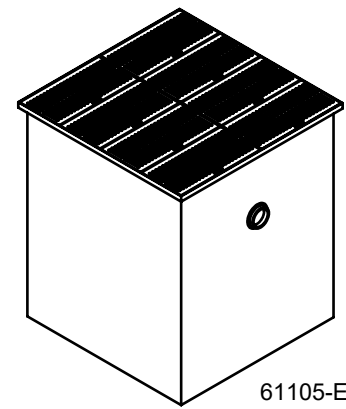

61105-EXT

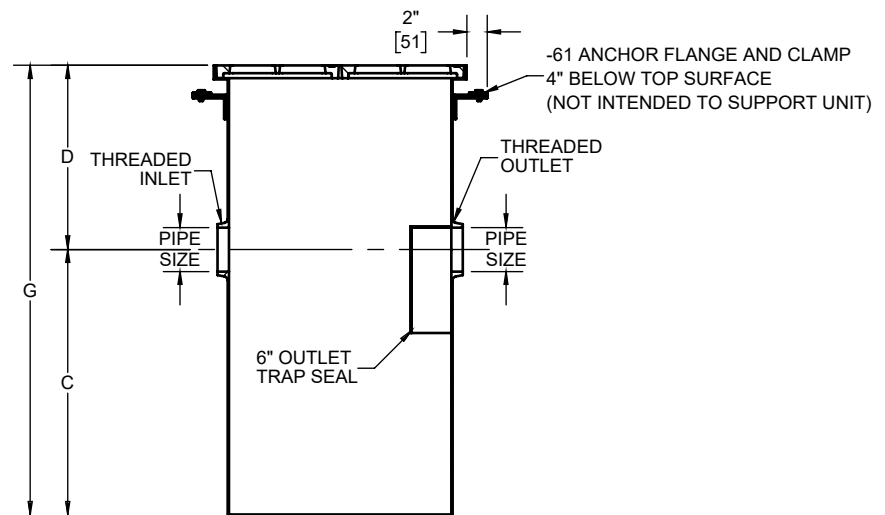

For custom extension height:

Specify "D" dimension= in.

New "G" dimension= in.
("C" + "D")

Product is non-cancellable
and non-returnable

Name: _____ Signature: _____ Date: _____

OPTIONS:

-HD	Solid heavy duty diamond plate cover
-7	Ductile iron grates
-7-H20	DI grates with welded supports
-61	Anchor flange and clamp
-SS	ST. ST. INT. with 1/2" smooth solid cover

Type	#Of grates	GPM flow	Pipe size	C	D*	E	F
61103-EXT	2	20	4	26	18	24-3/4	24-1/2
61104-EXT	4	50	4	26	18	49-1/4	24-1/2
61105-EXT	8	150	4	38	18	49-1/4	48-3/4
61106-EXT	12	250	6	39	18	73-3/4	48-3/4
61107-EXT	20	500	6	51	18	122-3/4	48-3/4

* Dimensions based on standard 6" extension.

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

