

14044

Closet Carrier Double Offset And 2" Vent Specification

Josam 14044 series coated cast iron double vertical 4" hub and spigot offset fitting with 2" hub vent. Adjustable carrier body, invertible for siphon jet or blowout closets. With ABS extension with integral test cap, pylon feet, plated hardware and neoprene fixture gasket.



▢ For dimension shorter than 5-1/2" (1" min) cut extension. For longer extension (10-1/2" max) specify (-10).

☑ Recommend feet be secured to floor with 1/2" bolts and anchors (by others).

⊗ For siphon jet roughing over 6" or blowout roughing over 12-1/2" specify on order.

Siphon jet dims shown.
For blowout dims, use:

▢ Min 11" and max 16 1/2"

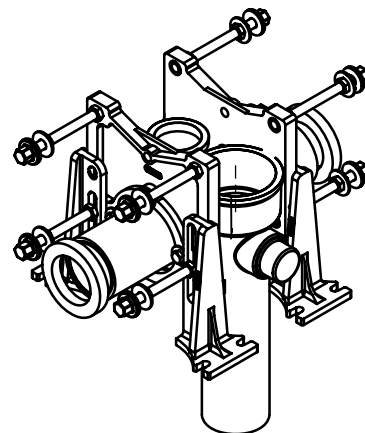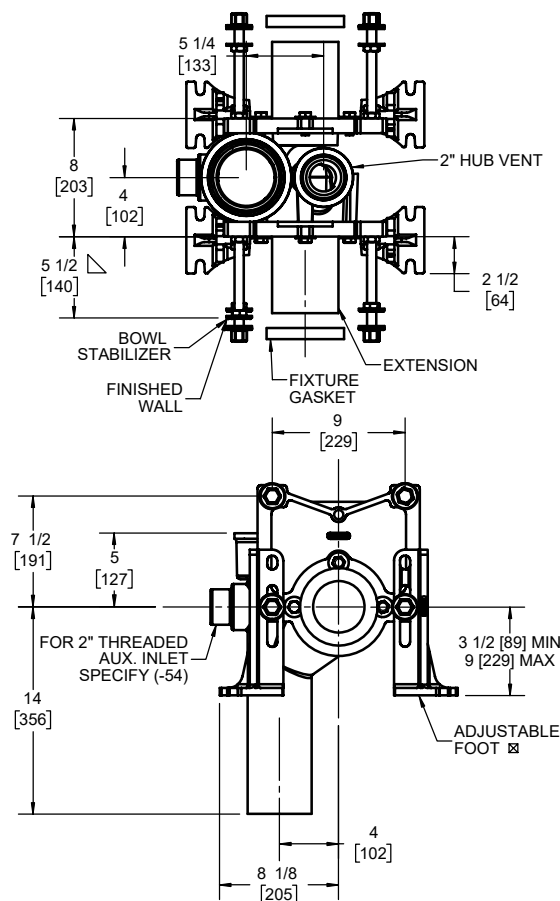

-SD	Special duty 500 LB carrier
-VP	Vandal-proof trim
-1	Positioning frame
-6	Supply pipe support (specify type of pipe)
-21	Hanger type closet adapter
-54	Threaded auxiliary inlet, opposite vent

-30	Cast iron adj. ext. w/ connector
-30-2	Cast iron adj. ext. w/ connector and test cap
-50	No-hub high auxiliary inlet, opposite vent
-54	Threaded high auxiliary inlet, opposite vent
-XSD	Extra special duty 1,000 LB carrier

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

